

Emcom Systems

127 Route 206 South, Suite 27
Trenton, NJ 08610
www.emcomsys.com

(609) 585-5500
Fax: (609) 585-7723
info@emcomsys.com

Communications Design

IP6030 Rugged, VoIP, Handset Phone

The IP6030 is a hardened, vandal-resistant, intelligent, handset telephone that provides VoIP (Voice over Internet Protocol) communications utilizing SIP (Session Initiation Protocol). It is designed to withstand the harsh environments of subways, train stations and tunnels and is ideal for waysides, bridges, airports and other public areas. Various models of the IP6030 range from a handset only, auto-connect unit to units with combinations of a keypad, a Liquid Crystal Display, external headphone jacks and A400 speaker/beacon drive capability. The IP6030 is programmed via a web browser or is remotely supervised, tested and programmed using an Emcom Systems' EmVista Maintenance Station.

Features

- Sealed Metal Keypad
- Noise Canceling Microphone
- Hearing Aid Compatible
- Remote Programming and Volume Adjust Via Web Browser or EmVista Maintenance
- Auxiliary Contact Closures
- 2-Year Warranty


Models: IP6030-0 Auto-Connect, No Keypad
IP6030-3 Keypad, A400 Speaker/Beacon Drive

IP6030-1 Keypad
IP6030-5 Keypad, Display (shown below)

Specifications

Dimensions: 11.75" H x 8.5" W x 3.5" D
Panel: 12 Ga. (.102") Brushed SS
Weight: 8 Lbs.
Armored Cord: 500 Lbs. Pull Strength
Connectors: 2 RJ-45, 2 Aux Contacts,
1 Power
Operating Temp: -40° C to +50° C
(-22° F to +122° F)

Power: 2.5 Watts for IP6030-0
9 to 54 VDC, 48 VDC POE
or 110 - 240 VAC 50-60 Hz
2 Aux Contacts: 120ma-250VAC Rating,
Opto-isolated
Freq. Response: 300Hz - 3KHz
MTBF: Greater Than 90,000 Hours

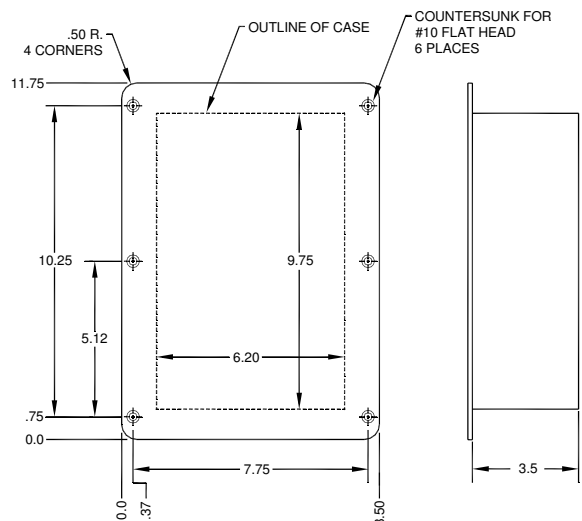

REV 02/18/10

The dynamic nature of this product design dictates that the information contained in this document be subject to change without notice. Emcom Systems assumes no responsibility for errors and/or omissions contained herein.